

# FLYTECH

POS

Build Smart Solutions for Tomorrow

## POS 335



Modular Design



Fanless



MSR



iButton



Fingerprint



2nd Display



Customer Display

### Application Benefits :



- Sleek, Stylish and Compact
- Energy Efficient
- Wall Mountable
- Superior Serviceability and Upgradability



The sleek and elegant design of POS 335 makes it a perfect fit to the retail and hospitality industry. With Intel's Bay Trail, the fanless POS 335 guarantees outstanding performance and enhances customer experience. Seamless integration of numerous peripheral modules such as MSR, iButton, Fingerprint, Second Display and Customer Display.

## Features

- 15" True-Flat PCAP Touch
- Intel Bay Trail Processor
- Fanless and Silent
- Easy Swap HDD
- Modular Design for Easy Serviceability
- MSR/ iButton/ Fingerprint Available
- 2nd Display and Customer Display Available

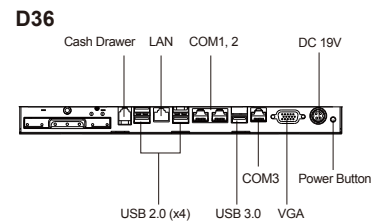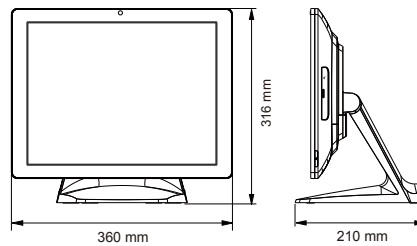

## Specification

<b>System</b>	Motherboard	D36
	Processor	Intel Bay Trail CPU Celeron J1900 2.4GHz
	Chipset	CPU Integrated
	System Memory	1x DDR3L SO-DIMM up to 8GB
	Storage Device	1x 2.5" SATA HDD or SSD
	Graphic Engine	Intel HD Graphic DX11 and OCL1.1
<b>LCD Touch Panel</b>	LCD Size	15" TFT LCD
	Brightness	300 nits
	Resolution	1024 x 768
	Touch Screen	True-Flat PCAP Touch
<b>Expansion</b>	Mini PCI-E Slot	1
<b>External I/O Ports</b>	USB	1x USB3.0, 4x USB 2.0
	Serial Port	3x RJ45 (powered RS232) (default 0V; COM1,COM2 0V/5V; COM3 0V/12V)
	LAN	1x RJ45
	Cash Drawer	1x RJ11 (12V/24V)
	VGA	1x DB15
	Audio Line-out	1 (Option)
	DC Jack	1x 4 pin w/ lock
<b>Optional I/O</b>	Powered USB	1x Powered USB 12V, 1x Powered USB 24V
<b>Audio</b>	Internal Speaker	2x 2W (Option)
<b>Indicator</b>	LED Indicator	1
<b>Power</b>	Power Supply	65W / 19V (120W / 19V with PUSB 12V & 24V)
<b>Communication</b>	WLAN + BT	802.11 a/b/g/n/ac WLAN card + BT 4.0 (Option)
<b>Peripheral (Option)</b>	MSR	3-Track MSR (USB)
	iButton	iButton (USB)
	Fingerprint	Fingerprint Reader (USB)
	2nd Display	8.4" without touch
	Customer Display	LCM display 2 x 20 characters (USB)
<b>Certificate</b>	EMC & Safety	FCC Class A, CE Mark, LVD
<b>Environment</b>	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 80% RH non-condensing
<b>Dimensions (WxDxH)</b>		360 x 210 x 316 mm (14.2" x 8.3" x 12.4")
<b>Weight</b>		5.4 kg (11.9 lbs)
<b>Mounting</b>		VESA Mount 100 x 100
<b>OS Supported</b>		Windows 7, POSReady 7, Windows Embedded 8.1 Industry, Windows 10 IoT Enterprise, Linux

### Taiwan - Headquarters

No.168, Sing-ai Rd., Neihu District,  
Taipei City 11494, Taiwan, R.O.C.  
Tel: 886-2-8791-4988  
Fax: 886-2-8791-4966  
E-mail: sales@flytech.com.tw  
www.flytech.com

### U.S.A. - California

728 Charcot Ave, San Jose,  
CA 95131, U.S.A  
Tel: 1-510-257-5180  
Fax: 1-510-257-5181  
E-mail: sales@flytech.com

### China - Shanghai

3F Building 39, No. 333 Qin Jiang Rd.,  
Shanghai 200233, P.R.China  
Tel: 86-21-5426-1555  
Fax: 86-21-5426-1001  
E-mail: sales@flytech.com.cn  
www.flytech.com.cn

### China - Hong Kong SAR

Room 01, 6/F, Block A, Tonic Industrial  
Centre, 26 Kai Cheung Road, Kowloon  
Bay, Kowloon, Hong Kong.  
Tel: 852-3525-5800  
Fax: 852-2751-7447  
E-mail: sales@flytech.com.hk